

| Option Table              |  |               |  |
|---------------------------|--|---------------|--|
| Project                   |  | Configuration |  |
| Intelligent<br>Security   | Electro-hydraulic directional transmission                     | •             |  |
|                           | Full set of OPS  | 0             |  |
|                           | Stamping special-shaped overhead guard                         | •             |  |
|                           | Tilt cylinder self-locking valve                               | •             |  |
|                           | Heli intelligent fleet management system                       | 0             |  |
|                           | Foldback prefilter   | 0             |  |
|                           | main power switch  | 0             |  |
|                           | Fuel tank cap with lock  | •             |  |
|                           | Fire extinguisher  | 0             |  |
| Comfort &<br>Convenien ce | Full suspension seat   | 0             |  |
|                           | Suspended overhead guard                                       | •             |  |
|                           | Descent buffer   | •             |  |
|                           | Front and rear adjustable steering column                      | •             |  |
|                           | Reversing horn handle  | 0             |  |
|                           | USB interface  | 0             |  |
|                           | Instrument identification                                      | 0             |  |
|                           | Electric fan   | 0             |  |
|                           | Reversing voice horn   | 0             |  |
|                           | Meet the latest emission power (National IV/National III)      | •             |  |
|                           | Load-sensing steering  | •             |  |
|                           | Full LCD instrument  | •             |  |
|                           | High exhaust   | •             |  |
| Cab                       | Front windshield   | 0             |  |
|                           | Rear windshield  | 0             |  |
|                           | Overhead guard   | •             |  |
|                           | Integral cab   | 0             |  |
|                           | Integral cab (installed with heater)                           | 0             |  |
|                           | Integral cab (installed with heater & cooling air conditioner) | 0             |  |
|                           | Integral cab (installed with cooling air conditioner)          | 0             |  |

| Option Table      |                                     |               |  |
|-------------------|-------------------------------------|---------------|--|
| Project           |                                     | Configuration |  |
| Lamplight         | LED lights                          | •             |  |
|                   | LED rear working lights (2 pcs)     | 0             |  |
|                   | Warning light (rotating)            | 0             |  |
|                   | Warning light (rotating buzzer)     | 0             |  |
|                   | Warning light (flashing)            | 0             |  |
|                   | Blue light                          | 0             |  |
| Lifting<br>System | Basic mast                          | •             |  |
|                   | Full free mast (2-stage or 3-stage) | 0             |  |
|                   | Non-standard attachments            | 0             |  |
|                   | Mast height                         | 0             |  |
|                   | Fork arm carrier                    | 0             |  |
|                   | Load-backrest                       | 0             |  |
| Other             | Metric thread                       | •             |  |
|                   | American standard thread            | 0             |  |
|                   | Solid tire                          | 0             |  |
|                   | Tilt cylinder sheath                | 0             |  |
|                   | Steering cylinder sheath            | •             |  |
|                   | Universal key                       | 0             |  |
|                   | Customized colors                   | 0             |  |

Linked in

YouTube

Note: Standard ;Optional .

www.heliforklift.net







ANHUI HELI CO., LTD.

Add / No.668, FangXing Road, Hefei, China Fax / +86-551-63639966 Tel / +86-551-63639068(America); 63639258(Europe); 63639358(Asia); 63662105(Africa & Middle East); 63639530(Overseas Marketing)

\* Our products are subject to improvements and changes without notice.



# **CPCD** 20/25/30/35

W11Y2G3 2WD / QC2Y2G3 2WD / XC6Y2G3 2WD / KU1Y2G3 2WD W3Y2G3 2WD/W4Y2G3 2WD/XC3Y2G3 2WD/KU5Y2G3 2WD W3Y4G3 4WD / W4Y4G3 4WD / XC3Y4G3 4WD / KU5Y4G3 4WD

75D G3 series Internal Combustion Counterbalanced Rough Terrain Forklift Truck



## **SUPERIOR DESIGN**

Off-road wide base tires with large treads

- Fashionable and Aesthetic streamlined design
- Stable and reliable performanceDual drive or four-wheel drive
- off-road tires
- Widely used in fields, farms, orchards and other tough road conditions

#### **Powerful & Efficient**

- Multi-position gearbox with flexible connection;
- Dual drive or four-wheel drive, energy conservative and high efficient;
- Flexible connected drive axle with ultrahigh configuration;
- Greatly improved off-road performance hydraulic system with load sensing valve, faster lifting speed;
- Lightweight mast, widened frame and upper beam of optimized design high carrying capacity.

#### Stable & Reliable

Radiator

- Off-road wide base tires with large treads;
- Improved radiator structure, optimized cooling system, better heat dissipation performance;




#### **CPCD** 20/25/30/35





- In-position sensing system, effectively avoid misoperation;
- Optimized drive line system, larger ground clearance, lower center of gravity, improved stability and passability;
- Pedal mechanism optimization: inching pedal is connected to inching valve directly;
- Ip65 digital lcd meter;
- Sealing structure of 24 cone rubber hose, add "0" type sealing ring, better sealing effect.

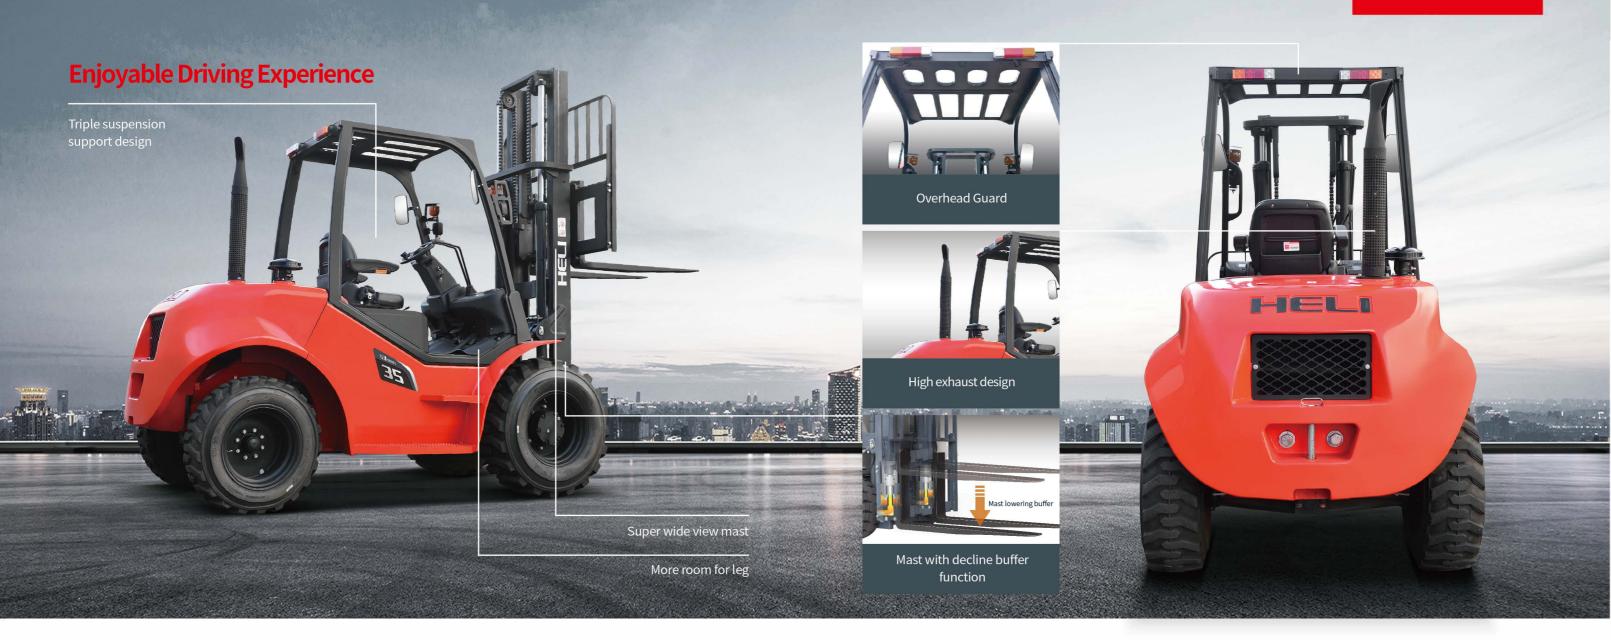



Ergonomic instrument panel: integrated handle switch, ratchet type hand brake and integrated electro-hydraulic reversing handle

## Easy to Maintain



#### **CPCD** 20/25/30/35

